





System 45 panels



technical

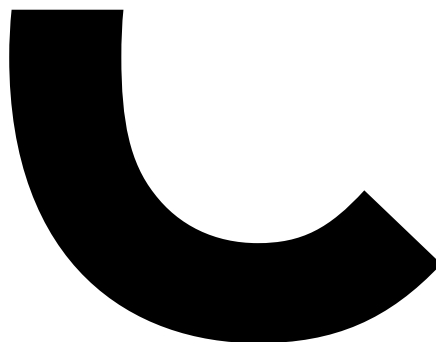



## **System 45 panels**

System 45 panels are simple to understand, plan and install.

Complete rigidity is achieved with an economy of parts and materials.

A breakthrough design that combines elegant simplicity, with strength and quality engineering.

## **Index**

panels **02-03**

junctions and connectors **04-07**

post/junction **08**

worksurfaces **09**

cable reticulation **10-11**

accessories **12**

specification of system 45 panel system **13**



# Panels









base panels | suspended panels | stacker panels

## Key Features

High flexibility with fast assembly, reconfiguration and relocation requiring a single allen key.  
 Panels are 45 mm thick with (load bearing) top transom rail and off-module panel capability.  
 Minimal componentry required for panel junctions available in 90°, 120° and linear.  
 Base panels can accept stackable (add-on) panels to increase screen height.

Optional cable reticulation and outlet modules.  
 Choice of standard panel construction, optional pinable or acoustic sound absorbing panel cores.  
 Seamless compatibility with comprehensive ranges of desking, storage, tables and accessory options.  
 Extensive selection of panel types, colours and finishes.  
 All components are reusable.

### BASE PANELS

 <b>code</b> S45.S1	 <b>code</b> S45.S2	 <b>code</b> S45.G1-1-CG S45.G1-1-FG S45.G1-2-FG	 <b>code</b> S45.SG-1-CG S45.SG-1-FG S45.SG-2-FG
 <b>code</b> S45.S1-FWT	 removable feature divider	 <b>code</b> S45.S1-W	 <b>code</b> S45.S2-W









- a\_Solid panel
- b\_Two piece solid panel with mid transom
- c\_Centre full glazed panel  
 Offset full flush glazed panel  
 Double full flush glazed panel
- d\_Two piece centre partial glazed panel with mid transom  
 Two piece offset partial flush glazed panel with mid transom  
 Two piece double partial flush glazed panel with mid transom
- e\_Solid panel with function wall top transom
- f\_Example of a removable feature divider available in glass, acrylic, eco panel, powder coated MDF and veneer
- g\_Solid panel with wave top
- h\_Two piece solid panel with mid transom and wave top

### BASE PANELS

panel heights (mm)	panel widths (mm)									
	450	600	750	800	900	1200	1500	1800	2100	2400
900	•	•	•	•	•	•	•	•	•	•
1050	•	•	•	•	•	•	•	•	•	•
1200	•	•	•	•	•	•	•	•	•	•
1350	•	•	•	•	•	•	•	•	•	•
1500	•	•	•	•	•	•	•	•	•	•
1800	•	•	•	•	•	•	•	•	•	•
2100	•	•	•	•	•	•	•	•	•	•
2400	•	•	•	•	•	•	•	•	•	•

\*Special sizes available on request

### SUSPENDED PANELS

 <b>code</b> S45-SU.S1	 <b>code</b> S45-SU.S2	 <b>code</b> S45-SU.G1-1-CG S45-SU.G1-1-FG S45-SU.G1-2-FG	 <b>code</b> S45-SU.SG-1-CG S45-SU.SG-1-FG S45-SU.SG-2-FG
 <b>code</b> S45-SU.S1-FWT	 removable feature divider	 <b>code</b> S45-SU.S1-W	 <b>code</b> S45-SU.S2-W





- a\_Solid panel
- b\_Two piece solid panel with mid transom
- c\_Centre full glazed panel  
 Offset full flush glazed panel  
 Double full flush glazed panel
- d\_Two piece centre partial glazed panel with mid transom  
 Two piece offset partial flush glazed panel with mid transom  
 Two piece double partial flush glazed panel with mid transom
- e\_Solid panel with function wall top transom
- f\_Example of a removable feature divider available in glass, acrylic, eco panel, powder coated MDF and veneer
- g\_Solid panel with wave top
- h\_Two piece solid panel with mid transom and wave top

### SUSPENDED PANELS

panel heights (mm)	panel widths (mm)							
	450	600	750	800	900	1200	1500	1800
900	•	•	•	•	•	•	•	•
1050	•	•	•	•	•	•	•	•
1200	•	•	•	•	•	•	•	•
1350	•	•	•	•	•	•	•	•
1500	•	•	•	•	•	•	•	•

\* Special sizes available on request  
 \* Panel height dimensions show the actual heights of the panels  
 They do not include suspension distance from floor

### STACKER PANELS

 <b>code</b> S45-ST.S1	 Solid panel	 <b>code</b> S45-ST.G1-1-CG S45-ST.G1-1-FG S45-ST.G1-2-FG	 <b>code</b> S45-ST.S1-W
--	--	---	--

a\_stack add-on panel  
 b\_base panel

### STACKER PANELS


heights (mm)	panel widths (mm)							
	450	600	750	800	900	1200	1500	1800
150	•	•	•	•	•	•	•	•
300	•	•	•	•	•	•	•	•
450	•	•	•	•	•	•	•	•

\* Special sizes available on request

# Panels

void panels | glazing options | wall starter bracket | finishes


## VOID PANELS




**height** 300/400

Void panels connect to system 45 base panels to create a 300 mm or 400 mm void between the underside of the panel and the floor

## SUSPENDED PANEL ATTACHING BRACKETS




**code** S45-CLM-L.H.  
S45-CLM-R.H.

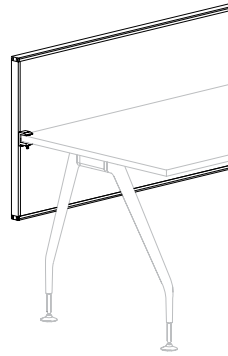


## GLAZING OPTIONS

Centre glazing  
Flush glazing - single sided  
Flush glazing - double sided




**centre glazing** CG

Glass is offered in both clear and translucent  
Other finishes available on request



**flush glazing** 1-FG or 2-FG


Glass is offered in both clear and translucent  
Can be single or double sided




**code** WS1B-45

Wall starter bracket  
Attaches system 45 panel to wall  
2 - brackets required


## FINISHES




**fabric**




**perforated metal**  
CR perforation



**perforated metal**  
MW perforation



**pinable fabric screen**



**powdercoated MDF**


Panel faces can be specified in a variety of finishes as illustrated  
Panel trims are finished in hard wearing powdercoat with colour as selected  
Materials and colours are subject to availability



**laminate**



**veneer**




**echo panel**




## Junction Connectors

straight junction | 90° two way open junction | 90° two way closed junction | 90° three way open junction  
 | common height panels

### STRAIGHT JUNCTION



### COMMON HEIGHT PANELS




**set code** S45.J180.1W.S (base panel set)

Junction connector set comprises  
 2-type B-671 011 connectors




**set code** S45-SU.J180.1W.S (suspended & void panel set)

Junction connector set comprises  
 4-type B-671 011 connectors

### 90° TWO WAY OPEN JUNCTION




### COMMON HEIGHT PANELS






**set code** S45.J90.2W.O

Junction connector set comprises  
 2-type B-671 005 connectors

### 90° TWO WAY CLOSED JUNCTION




### COMMON HEIGHT PANELS






**set code** S45.J90.2W.C

Junction connector set comprises  
 2-type B-671 002 connectors

### 90° THREE WAY OPEN JUNCTION



### COMMON HEIGHT PANELS



**set code** S45.J90.3W.O





Junction connector set comprises  
 4-type B-671 005 connectors

## Junction Connectors

90° three way closed junction | 90° off module junction | 90° four way junction | 90° four way umbilical junction  
 | common height panels

### 90° THREE WAY CLOSED JUNCTION

### COMMON HEIGHT PANELS







set code S45.J90.3W.C

Junction connector set comprises  
 a\_4-type B-671 003 connectors and  
 b\_2-type B671 011 connector

### 90° OFF MODULE JUNCTION

### COMMON HEIGHT PANELS







set code S45.J90.3W.OM

Junction connector set comprises  
 2-type B-671 002 connectors

### 90° FOUR WAY JUNCTION

### COMMON HEIGHT PANELS







set code S45.J90.4W.C

Junction connector set comprises  
 8-type B-671 005 connectors

### 90° FOUR WAY JUNCTION

Panels set for umbilical entry  
 (35 mm wide access opening)

### COMMON HEIGHT PANELS



set code S45.J90.4W.U (4 way junction)

Junction connector set comprises  
 8-type B-671 007 connectors

set code S45.J90.3W.U (3 way junction)

Set comprises  
 4-type B-671 007 connectors

## Junction Connectors




120° three way junction | 120° tech column three way junction | common height panels

Each common height junction has an individual product code no. as shown. Connectors are specified as one set for each junction.

By specifying the code no's and quantities of the junctions required, the appropriate quantity and type of connectors will be supplied.

### 120° THREE WAY CLOSED JUNCTION

### COMMON HEIGHT PANELS






set code S45.J120.3W.C

Junction connector set comprises 6-type B-671 004 connectors

### 120° THREE WAY JUNCTION

Panels set for services access (44 mm wide access opening)

### COMMON HEIGHT PANELS






set code S45.J120.3W.O

Junction connector set comprises 6-type B-671 009 connectors

### 120° THREE WAY JUNCTION

Panels set for umbilical entry (84 mm wide access opening)

### COMMON HEIGHT PANELS







set code S45.J120.3W.U

Junction connector set comprises 6-type B-671 006 connectors

### 120° TECH COLUMN THREE WAY JUNCTION COMMON HEIGHT PANELS

Panels connect to tech column



set code S45.J120.3W.TC

Junction connector set comprises 6-type TECHBKT-01A connectors





## Junction Connectors

180° straight junction | 90° two way open junction | 90° two way closed junction | 90° of module junction  
 | transition height junctions

Junction connectors for transition height junctions are specified **per each not 'per set'**. Each of the examples shown below indicate the connector product codes and the quantity required of each to achieve the junction.

### 180° STRAIGHT JUNCTION

### TRANSITION HEIGHT PANELS








code WS1B-45

connectors required

1-wall starter bracket

### 90° TWO WAY OPEN JUNCTION

### TRANSITION HEIGHT PANELS

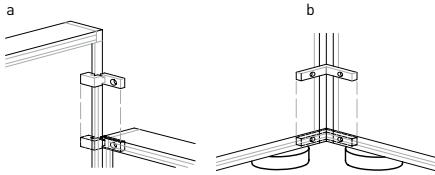






connectors required

a\_1- type B-671 013 connector

b\_1- type B-671 005 connector

### 90° TWO WAY CLOSED JUNCTION

### TRANSITION HEIGHT PANELS

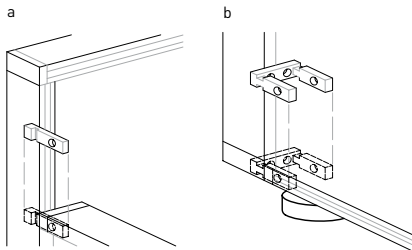





connectors required

a\_1- type B-671 001 connector

b\_1- type B-671 002 connector

### 90° OFF MODULE JUNCTION

### TRANSITION HEIGHT PANELS



connectors required

2- type B-671 002 connectors


## Post/Junction

### system 45 post and panel


#### System 45 corner post

Corner junction post for System 45 suspended panels. Forms two way, three way and four way junctions with either common height or transition height panels.


#### JUNCTION POST




end support post




180° linear junction



two way 90° junction




three way 90° junction




four way 90° junction


All system 45 panel types can be suspended between the posts. There is also an optional enclosed cable duct with soft wired services outlets, clip-on shelves and accessory items.

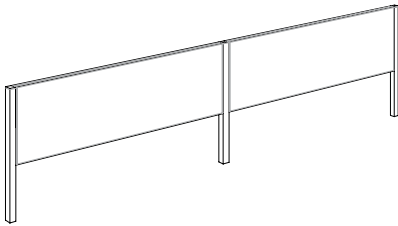

180° linear connection

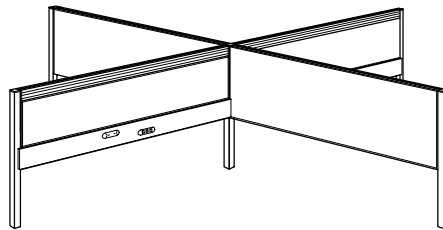

four way 90° junction with cable duct




code TECHBKT.01A

Post to panel connecting bracket

#### SYSTEM 45 STABILISING POST

An efficient and flexible way to provide desks, services and accessories to transitory work areas. Stabilising posts combine with system 45 panels to create light, open and portable freestanding panel runs.

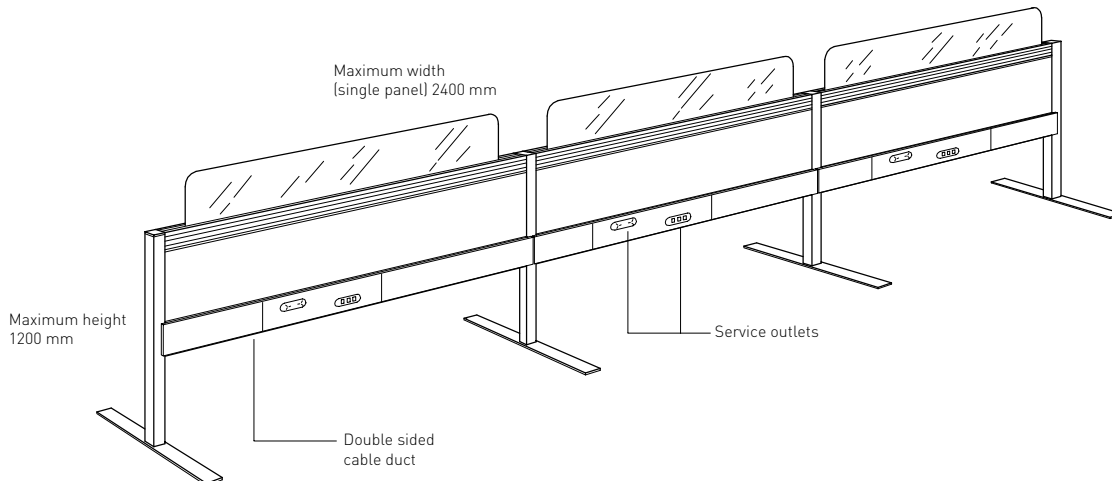

# Worksurfaces

typical workstation clusters for system 45 | worksurface support brackets | worksurface support legs





## Worksurfaces

Worksurfaces can be specified either 25 mm or 33 mm thick. Available finishes include selected laminates, timber veneers and powder-coated MDF in a range of colours.



There is a wide selection of shapes and sizes to ensure the right solution for task specific requirements. Edge finishes and shapes also offer many choices with custom shapes available on request.

### TYPICAL WORKSTATION CLUSTERS FOR SYSTEM 45



Cluster examples using various shaped worksurfaces




### WORKSURFACE SUPPORT BRACKETS




**a\_code** S45.D400LH-C  
**b\_code** S45.D600LH-C  
**length** a\_358 mm/b\_495 mm  
 Curved desk support brackets  
 Left hand




**a\_code** S45.D400RH-C  
**b\_code** S45.D600RH-C  
**length** a\_358 mm/b\_495 mm  
 Curved desk support brackets  
 Right hand




**a\_code** S45.D400D-C  
**b\_code** S45.D600D-C  
**length** a\_358 mm/b\_495 mm  
 Curved double desk support brackets




**code** S45.FTS-LH  
 Front top support bracket  
 Left hand




**code** S45.FTS-RH  
 Front top support bracket  
 Right hand



**code** S45.D400LH-45-C  
**length** 350 mm  
 Curved corner desk support brackets  
 Left hand




**code** S45.D400RH-45-C  
**length** 350 mm  
 Curved corner desk support brackets  
 Right hand



**code** S45/PNL-LCK-GUIDE  
 Panel locking guide. (Unhanded)  
 (Holds panels against adjustable  
 height worksurface)




**code** DJ-50  
**size** 50 mm x 50 mm  
 Underdesk joining plates




**code** DJ-300/400/500/600  
**depth** 150 mm  
**wide** 300/400/500/600 mm  
 Underdesk joining plate

### WORKSURFACE SUPPORT LEGS


Fixed height



**height** Leg 695 mm plus worksurface  
**dia.** 28 mm dia. QED  
**code** QLIF-NB-STRT




**height** Leg 695 mm plus worksurface  
**dia.** 28 mm dia. QED  
**code** QLIF-NB-10°




**height** Leg 687 mm plus worksurface  
**dia.** 70 mm dia. leg  
**code** U10 leg


### WORKSURFACE SUPPORT LEGS




**height** Height adjustable leg 610 mm to 735 mm plus worksurface  
**code** QED3-STRT



**height** Height adjustable leg 610 mm to 735 mm plus worksurface  
**code** QED3-10°



**height** Height adjustable leg 625 mm to 705 mm plus worksurfaces  
**code** Marina leg



## Cable Reticulation

cable routing | power blades | umbilical | 120° tech column | cylinder power pole


### Cable routing

System 45 offers a number of cable routing options. They can be combined to satisfy specific requirements while always providing easy access and efficient cable management throughout entire layouts.

Cables can be routed to panels from ceilings, walls or floors by utilising umbilicals, power blades or tech columns.


### POWER BLADES

Cable entry from ceiling or floor  
Exit points to suit requirements

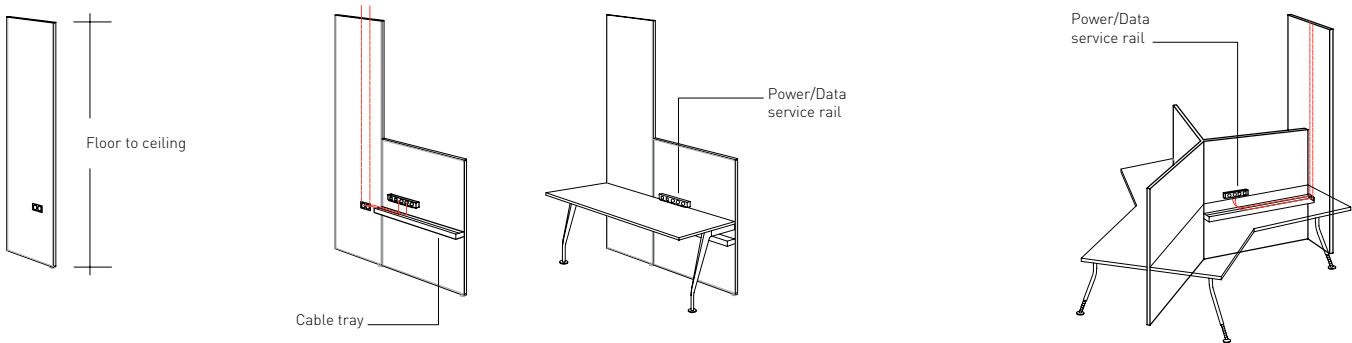


### UMBILICALS

Panels set for umbilical entry  
(35 mm wide access opening)

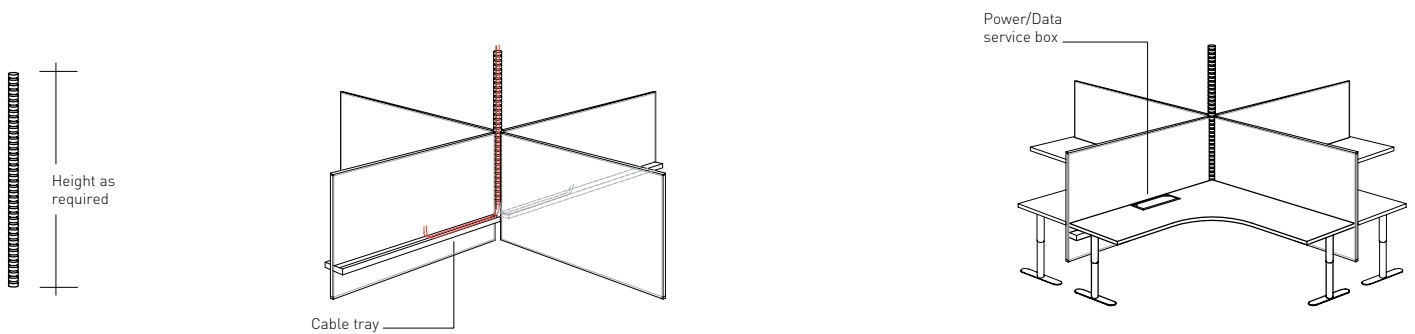

### 120° TECH COLUMN

Direct cable access from floor  
Ceiling access through top of tech column  
via umbilical or 80 mm dia. cylinder power pole

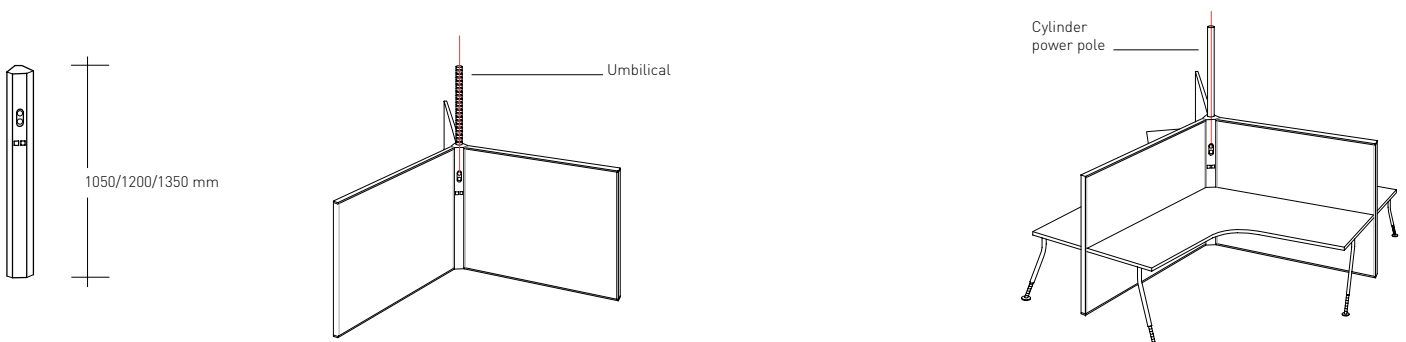

## Cable Reticulation

interpower soft wiring system | cable trays and baskets

### Interpower softwiring system

Schiavello interpower electrical softwiring system delivers power and lighting to office workstations. The system is easily connected, disconnected or relocated without the need to isolate power and with minimal inconvenience.

All connections within the interpower system are protected by a positive lock mechanism to prevent accidental power disconnection. All components are factory tested and easy to install. All interpower softwiring components are reusable.

#### STANDARD SERVICE RAIL




code SR/2P/4D

code SR/3P/4D

code SR/4P/4D

Mounts to rear of desktop

#### POWER MODULES

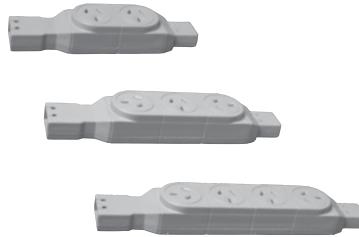


code PM2H

code PM2HTVL

code PM4VL

#### DATA MODULES

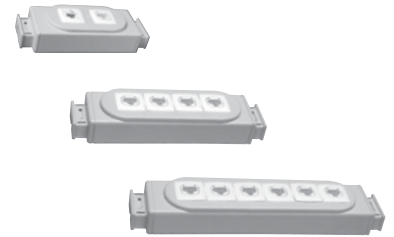

code NGDM/2

code NGDM/4

code NGDM/6

### INTERPOWER SOFTWIRING SYSTEM

Refer to Schiavello Interpower brochure SCH/W05-C for complete product information and technical specifications



code SS

Starter sockets




code JB-S

Junction box



code EX-S00 (add length  
i.e. 600m lead =  
EX-S00600)

Extension leads



code IDB0.1

Power/Data service box  
Inserts into desktops



code S45CAP


Cable access port  
Optional panel fitting where  
required to provide cable access  
through closed junctions

### Cable trays and brackets

Optional cable trays and brackets attach to either system 45 panels or underside of worksurfaces.

These simple lay-in and very flexible designs ensure cables can be neatly accommodated without intruding on to the worksurface or floor.

#### CABLE TRAYS AND BRACKETS



code EL/SERDCT-SQ

height 50 mm

depth 100 mm


width to order

Elitone metal cable tray




code S45/SERDCT/L

Cable tray  
support bracket L.H.  
Attaches to vertical mullion  
of system 45 panels



code S45/SERDCT/R

Cable tray  
support bracket R.H.  
Attaches to vertical mullion  
of system 45 panels




code 2CW/B

height 80 mm (inc.brackets)

depth 160 mm

length 660/860/1060 mm

Cable baskets  
Supplied with two brackets attaches  
to underside of worksurfaces




code STT/W/B

height 230 mm

depth 95 mm

length 900/1200 mm

Cable baskets  
Supplied with two brackets attaches  
to underside of worksurfaces



code QWCM-ASSY

height 65 mm

depth 120 mm

length to order

QED cable tray  
Attaches to underside  
of worksurfaces


## Accessories

### function walls | accessories

#### Function walls

Mount to transom rails of system 45 panels via integral mounting detail. Additional brackets not required.

#### FUNCTION WALLS

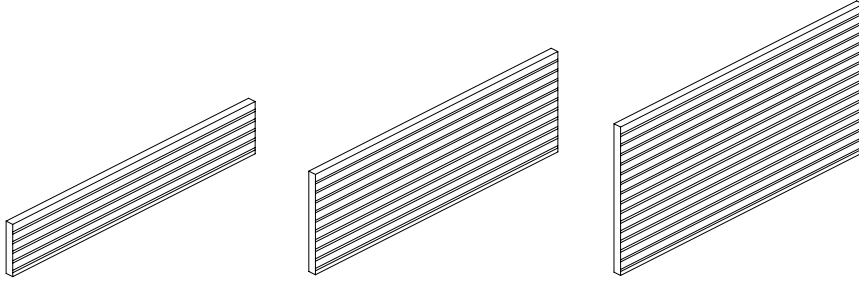


height 150 mm  
type FWT-150

height 300 mm  
type FWT-300


height 450 mm  
type FWT-450

#### ACCESSORIES - FOR TRANSOM RAIL AND FUNCTION WALL MOUNT




side\_a 300 mm  
side\_b 600|750|900|1050|1200  
side\_c 250|300|350|410 mm  
type ULT-SHLF-25

Ultimet shelf




side\_a 300 mm  
side\_b 600|750|900|1050|1200  
type ULT/SHLF-LINE-0600-DIV

Slimline shelf




side\_a 200 mm  
side\_b 150|260|390|520  
type ULT CD SHELF

CD holder 2-3-4




side\_a 225 mm  
side\_b 600|750|900|1050|1200  
type ULT/SL/SHELF-600

Slimline mini shelf




side\_a 50 mm  
side\_b 158 mm  
side\_c 26 mm  
type ULT-PTRAY/SM

Ultimet pencil tray - small




side\_a 122 mm  
side\_b 319 mm  
side\_c 26 mm  
type ULT-PTRAY/LG

Ultimet pencil tray - large




side\_a 245 mm  
side\_b 319 mm  
side\_c 26 mm  
type ULT-STRAY

Stationery tray (portrait)




side\_a 313 mm  
side\_b 251 mm  
side\_c 26 mm  
type ULT-STRAY-A4

Ultimet paper tray - A4 landscape




side\_a 115 mm  
side\_b 265 mm  
side\_c 272 mm  
type ULT-PHBOOK

Ultimet phone book holder



side\_a 245 mm  
side\_b 325 mm  
side\_c 39 mm  
type ULT-PHTRAY

Ultimet phone tray



side\_a 67 mm  
side\_b 40 mm  
side\_c 125 mm  
side\_d 25 mm  
type ULT/VASE


Vase



side\_a 40 mm  
side\_b 40 [overall height]  
type TH/CH

Transom hung coat hook

Natural anodised finish



side\_a 49 mm  
side\_b 170 mm  
type TH/NAMEPLATE 170

Transom hung name plate

## Specification of System 45 Panel System

general | panels | connectors | cable reticulation | aluminium finish | warranty

---

### General

System 45 is a fully refined office panel system manufactured by Schiavello Australia. The system is stackable, easily demounted, relocated, extended or reduced in size with all components being reusable.

### Panels

The panels have a thickness of 45 mm with single panel widths of up to 2400 mm.

They have a load bearing top transom rail and are designed to be either floor mounted or suspended from desks as required and as specified later. The panels are rigid, with the strength to support hampers, shelves and worktops.

They also have provision to accept accessories from both a horizontal and vertical position. The panels provide both integrated and transom mounted whiteboards and function walls including a full range of attachable accessory items.

Panel faces offer a choice of finishes including fabric, perforated metal, powdercoated MDF, laminate, timber veneer, fabric covered pinboard as well as single and double glazing.

Acoustic panels are also offered that have an acoustic sound absorption rate of not less than 60 NRC

### Connectors

The connecting system achieves the following junctions and connections:

- (a) 90°, 120°, 180°
- (b) 2 way, 3 way and 4 way junctions with either open access corners or closed corners.
- (c) Off module junctions ie: return panels of common or differing heights are able to achieve a 90° connection to a spine panel at any point along its length

### Cable Reticulation

The system includes integrated components that provide efficient means of routing services cabling to the panels from the ceiling, walls or floor. such as power blades, umbilicals or power poles.

The system also includes optional clip-on segregated cable trays with a selection of services outlet modules and soft wiring connections. The softwiring electrical system is Schiavello Interpower certified to AS/NZS 3131.

### Aluminium Finish

All aluminium is powdercoated to Australian Standard AS-NZ3570. Colour as specified.

### Warranty

The manufacturer warrants the system for a period of not less than 5 years against faulty materials and workmanship and guarantees the supply of parts and service of all standard components for a period of not less than 10 years from date of installation.



